



1501 Industrial Way North, Toms River, NJ 08755
Phone: (732) 349-2109 • Fax: (732) 244-0867

PART #21008

Skip Shift Eliminator

WARNING: SLP Recommends wearing safety glasses for the complete installation.

WARNING: SLP Recommends allowing the vehicle to cool (not running) for five hours before beginning installation.

WARNING: To avoid the chance of electrical shock or damage to your vehicle's electrical system, disconnect both the negative and positive batter leads (in that order) at the battery.

INSTALLATION INSTRUCTIONS - #21008

**WIRING
HARNESS
END**



**TRANSMISSION
END**

1. Raise and secure vehicle high enough to access the transmission.
2. Carefully remove the connector from the skip shift solenoid. Skip shift solenoid is located about halfway down the transmission case toward the top, on the drivers' side (See Figure 1).

Note: Do not install Skip Shift Eliminator on the reverse lockout solenoid.

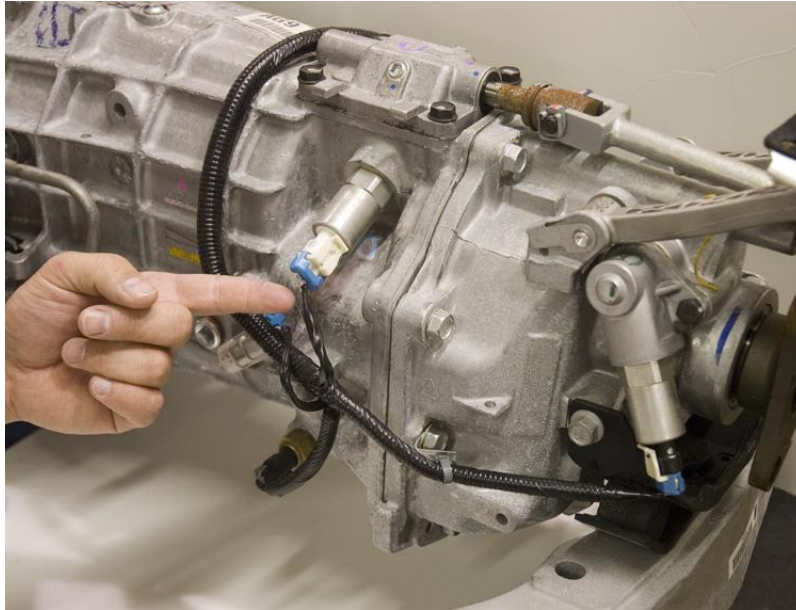


Figure 1: Skip Shift Solenoid Location

3. Install the white connector from the Ship Shift Eliminator onto the skip shift solenoid (transmission end) (See Figure 2).
4. Install the original connector from the vehicle wiring harness into the other connector on the Skip Shift Eliminator (See Figure 2).

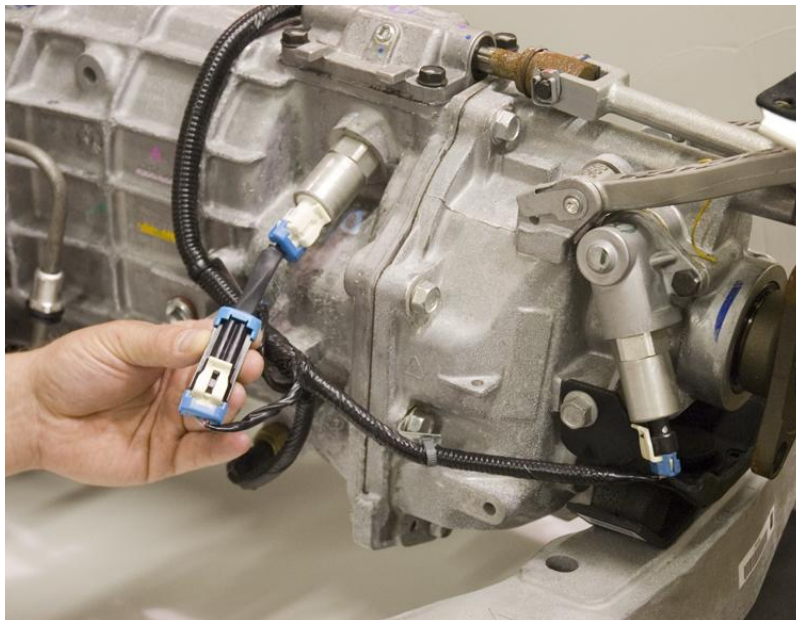


Figure 2: Skip Shift Eliminator Installed

5. Place wiring harness back into original location, tucked up along the transmission.